



US006023487A

United States Patent [19]
Jones

[11] **Patent Number:** **6,023,487**
[45] **Date of Patent:** **Feb. 8, 2000**

[54] **PROCESS FOR REPAIRING HEAT TREATING FURNACES AND HEATING ELEMENTS THEREFOR**

4,559,631	12/1985	Moller	373/130
4,608,698	8/1986	Moller et al.	373/130
4,612,651	9/1986	Moller et al.	373/130
5,497,394	3/1996	Jhawar et al.	373/130

[76] Inventor: **William R. Jones**, P O Box 205, Telford, Pa. 18969

Primary Examiner—Tu Ba Hoang

[21] Appl. No.: **09/306,212**
[22] Filed: **May 6, 1999**

[57] **ABSTRACT**

Related U.S. Application Data

This invention relates to heat treating furnaces which employ electric resistance heating elements and, in particular, to improved processes for repairing such furnaces and heating elements particularly useful in such repair. A typical vacuum furnace employing this invention provides a hot zone that is made for heavy duty heat treating applications. The furnace has a series of banks of axial-spaced electrical resistance heating elements suspended from an inner wall of its hot zone chamber by a series of support rods. Repeated furnace use can result in heating element fractures, which necessitate replacement of the heating elements. The replacement in accordance with this invention is with an element having a thicker and narrower cross section than previously existed in the furnace. The specially designed width-to-thickness aspect ratio heating elements according to this invention enables the elements to have a longer life between replacements.

[63] Continuation of application No. 09/027,868, Feb. 23, 1998.

[51] **Int. Cl.⁷** **H05B 3/66**

[52] **U.S. Cl.** **373/130; 373/128; 373/134; 219/532; 219/552**


[58] **Field of Search** 373/109, 112, 373/117-119, 127-130, 131, 134, 137; 219/520, 532, 552

[56] **References Cited**

U.S. PATENT DOCUMENTS


4,056,678	11/1977	Beall, III et al.	373/130
4,259,538	3/1981	Jones	373/130

5 Claims, 4 Drawing Sheets

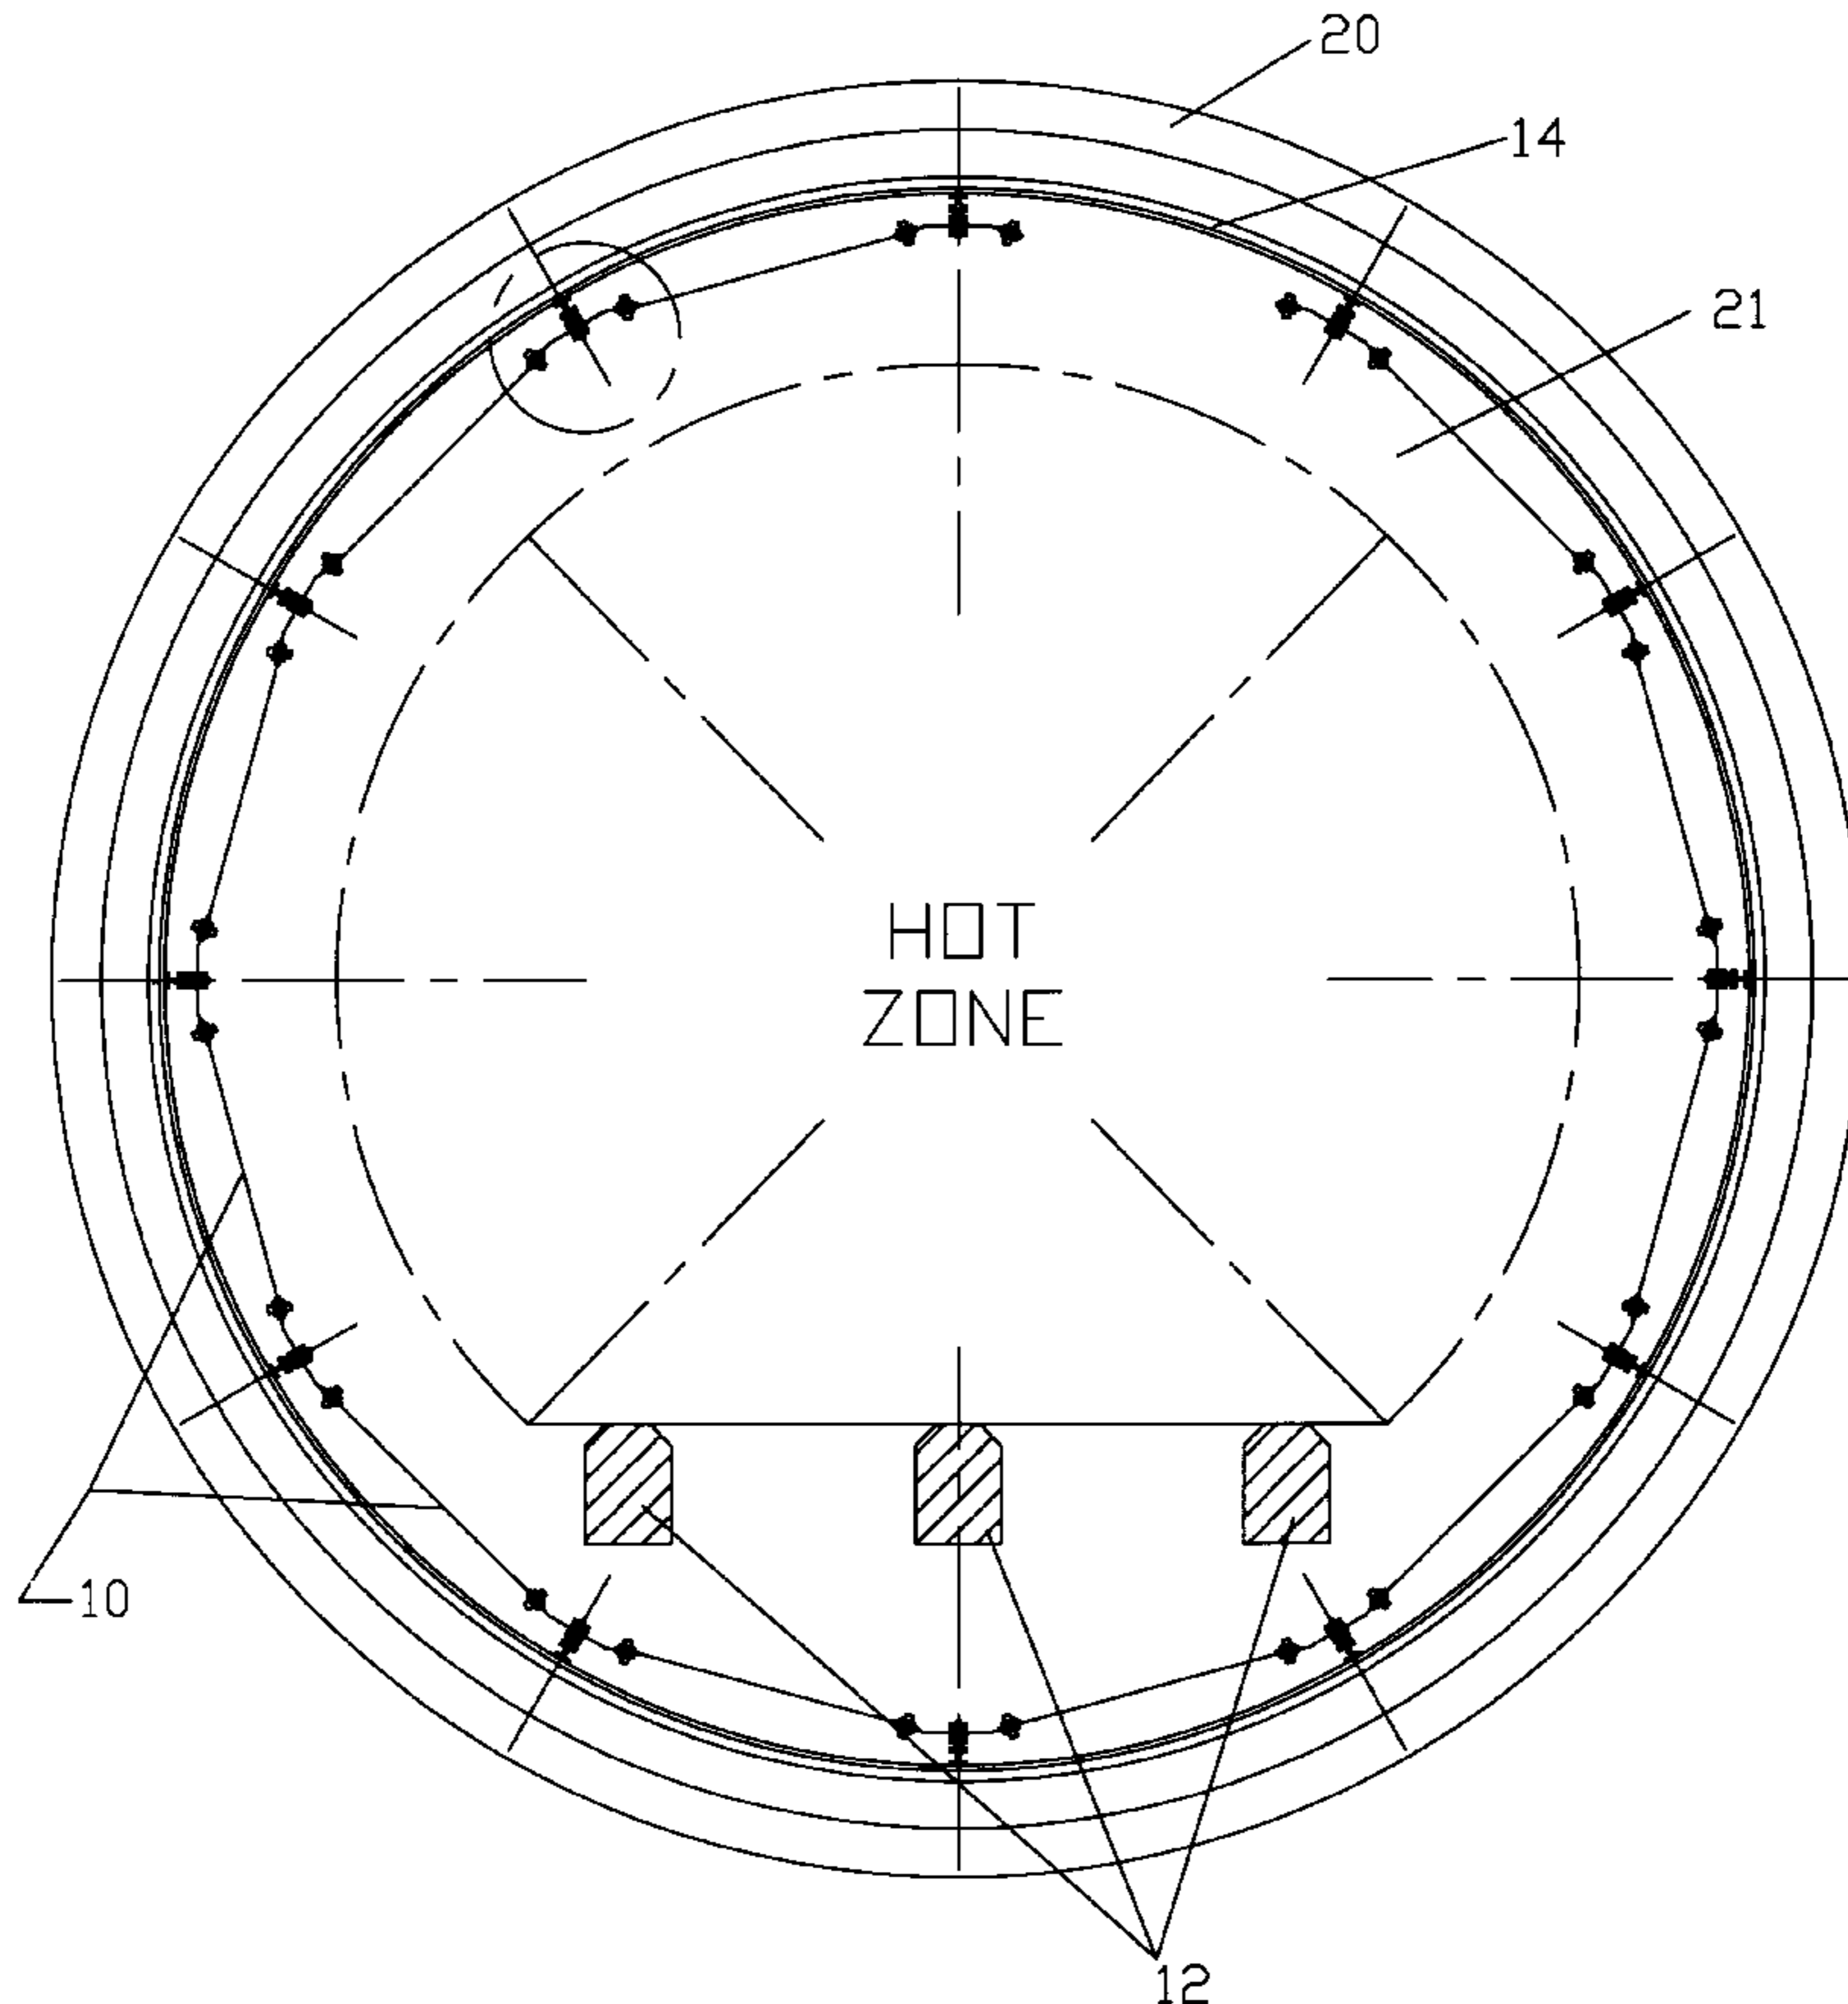

VIEW LOOKING INTO FURNACE

(VACUUM FURNACE 100)

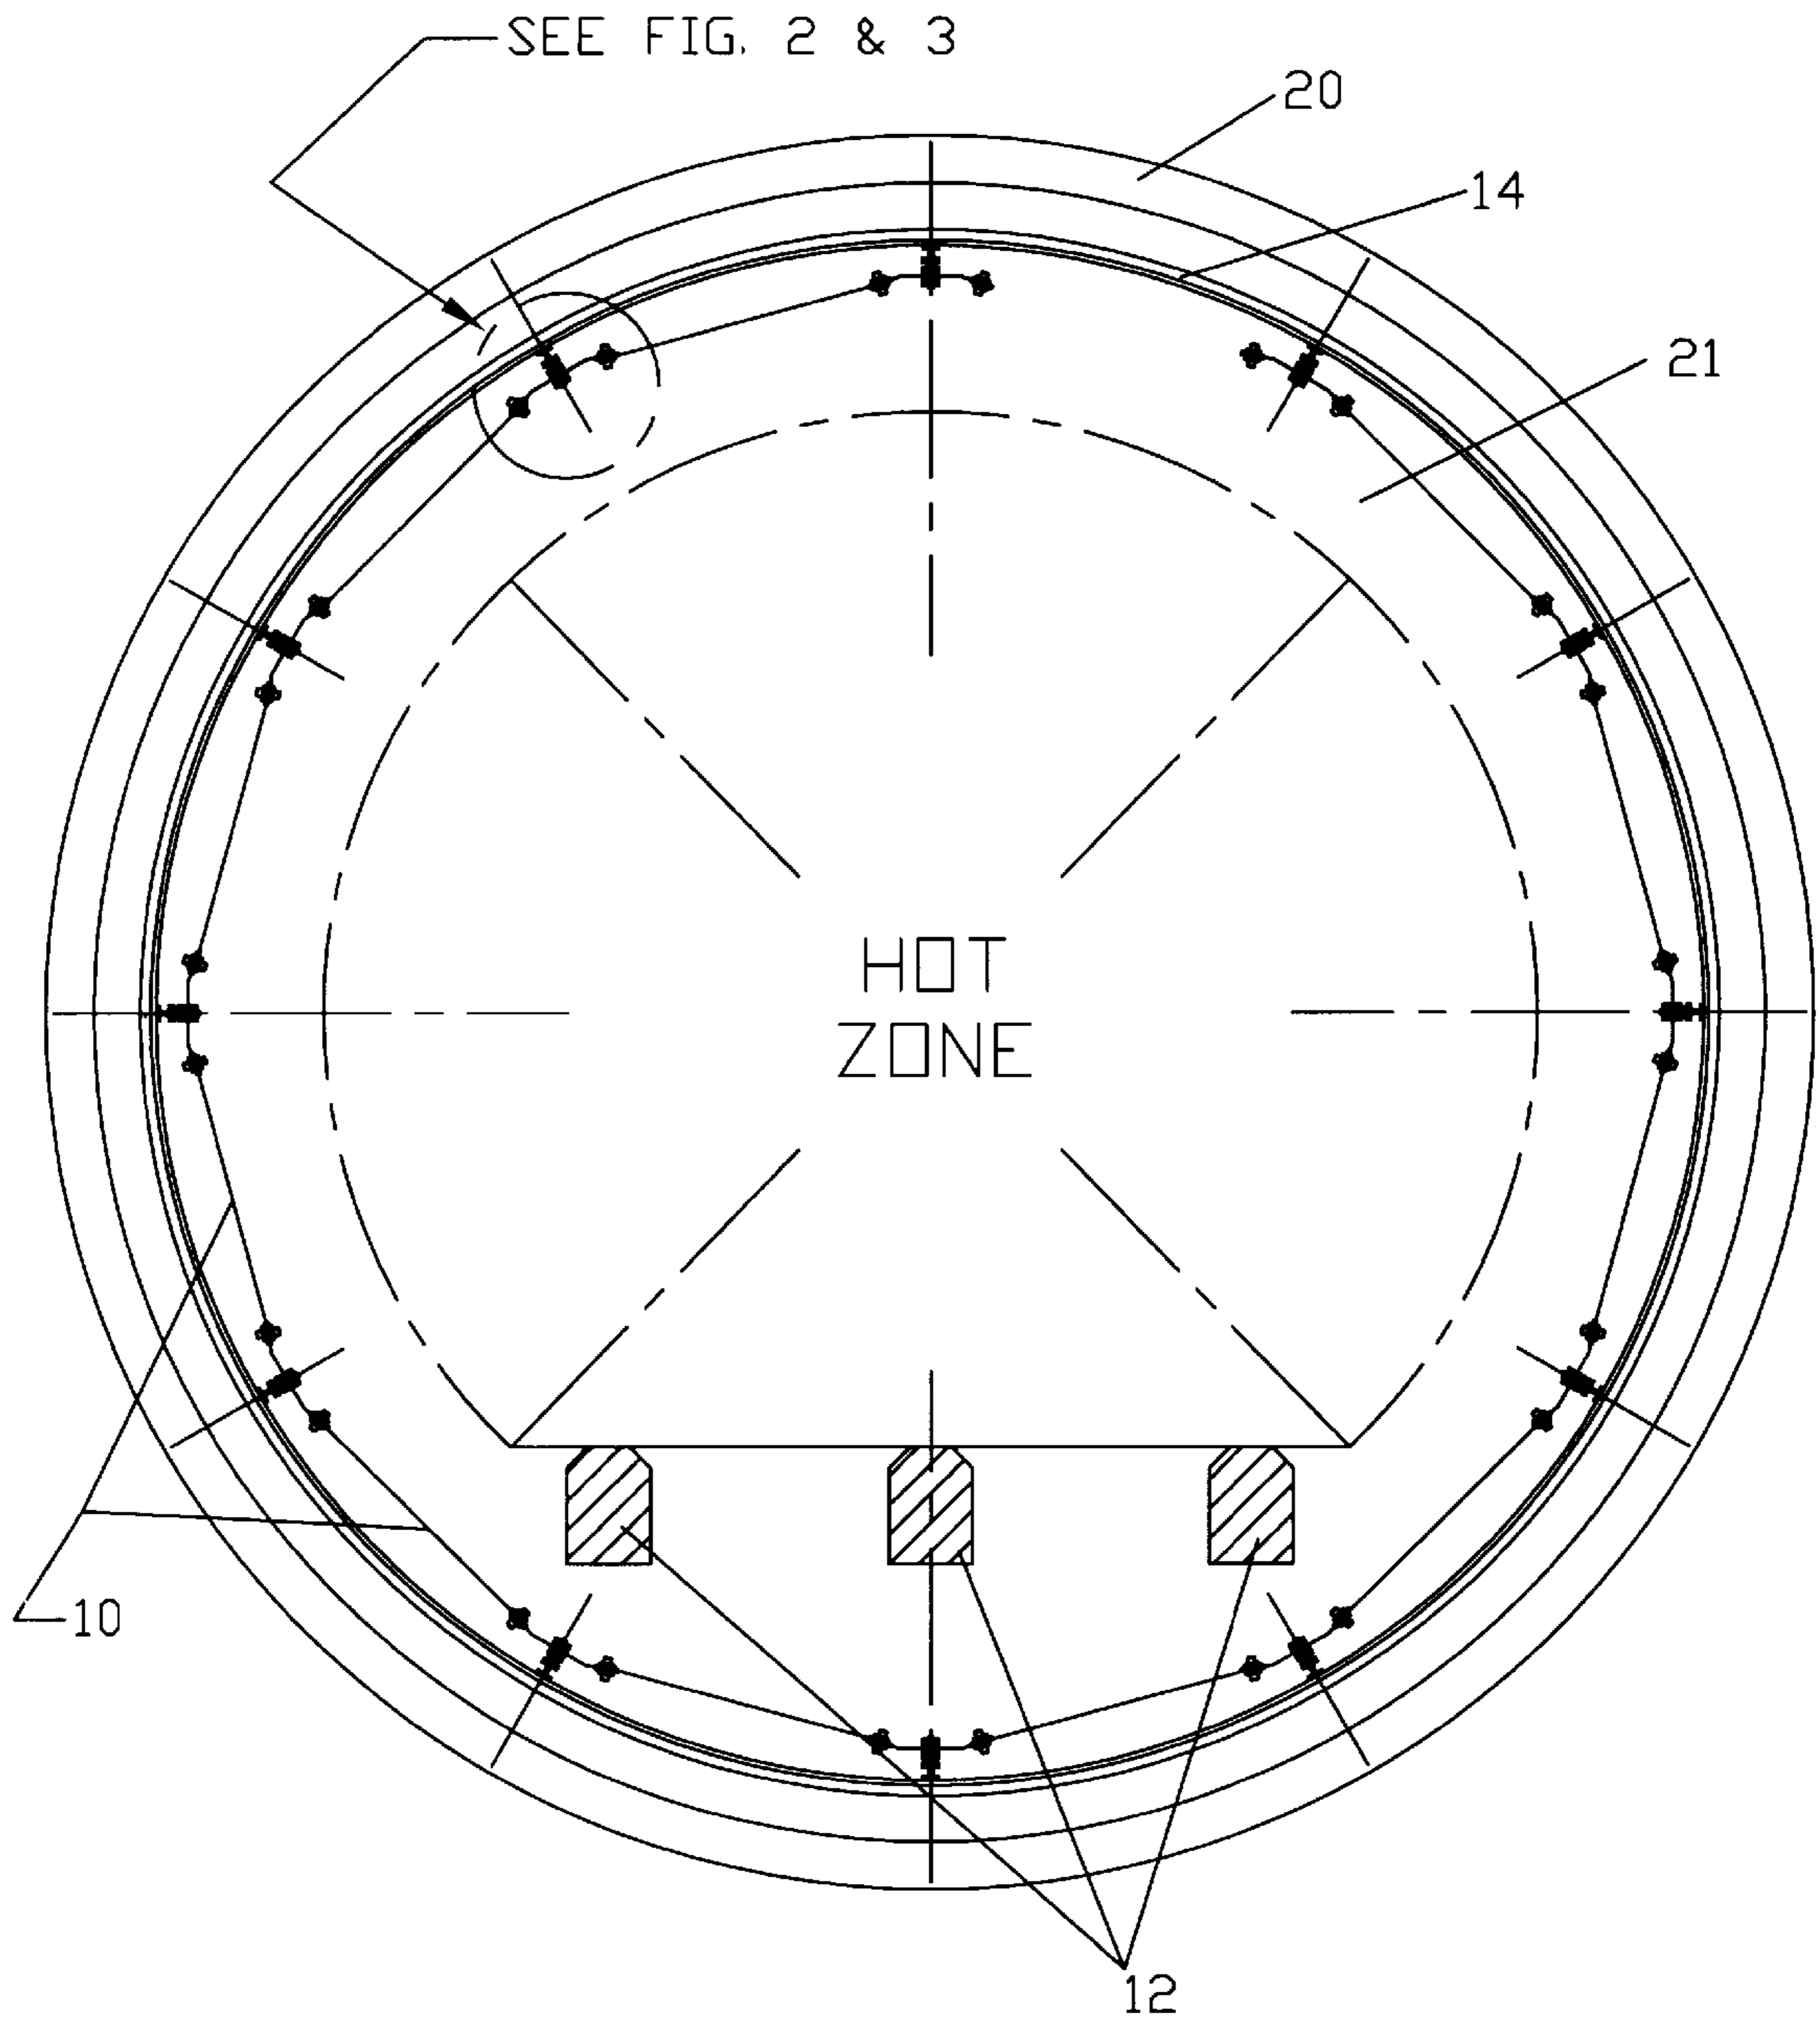

VIEW LOOKING INTO FURNACE

(VACUUM FURNACE 100)

FIG. 1

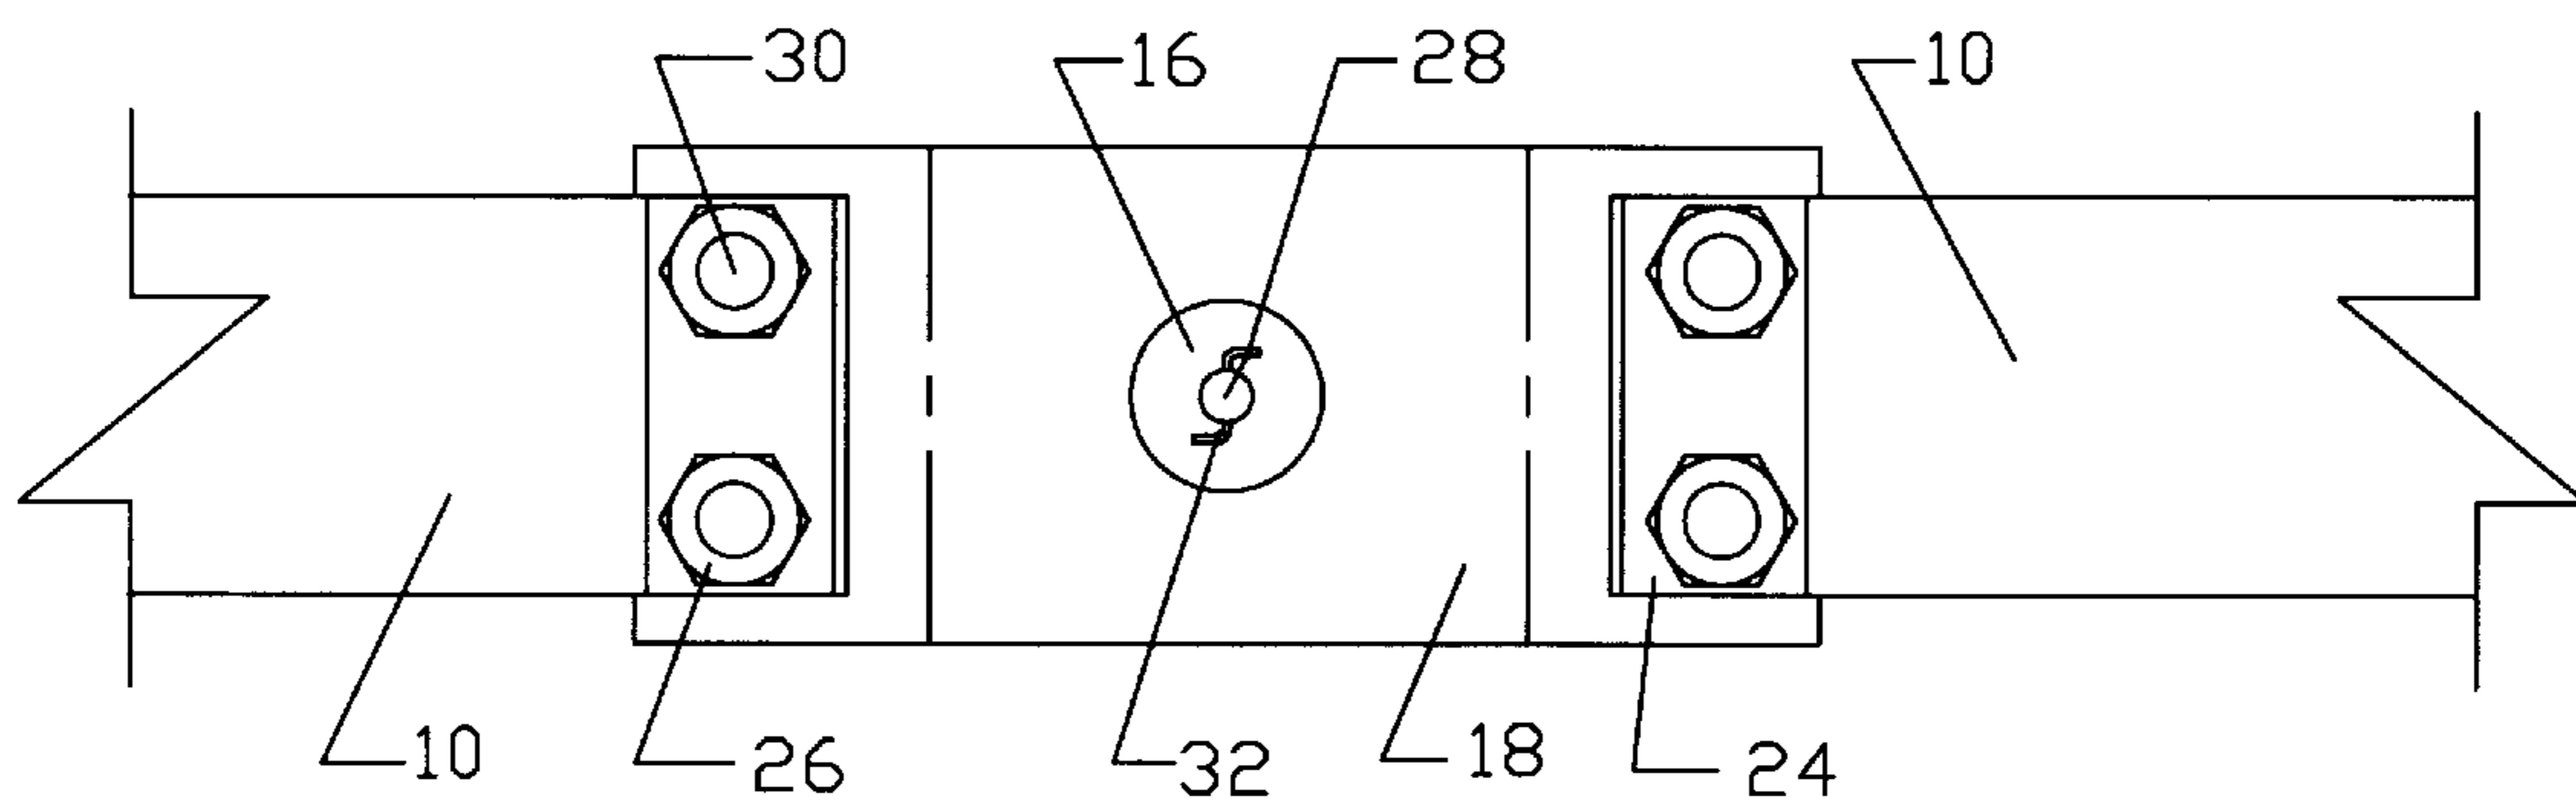


FIG. 2

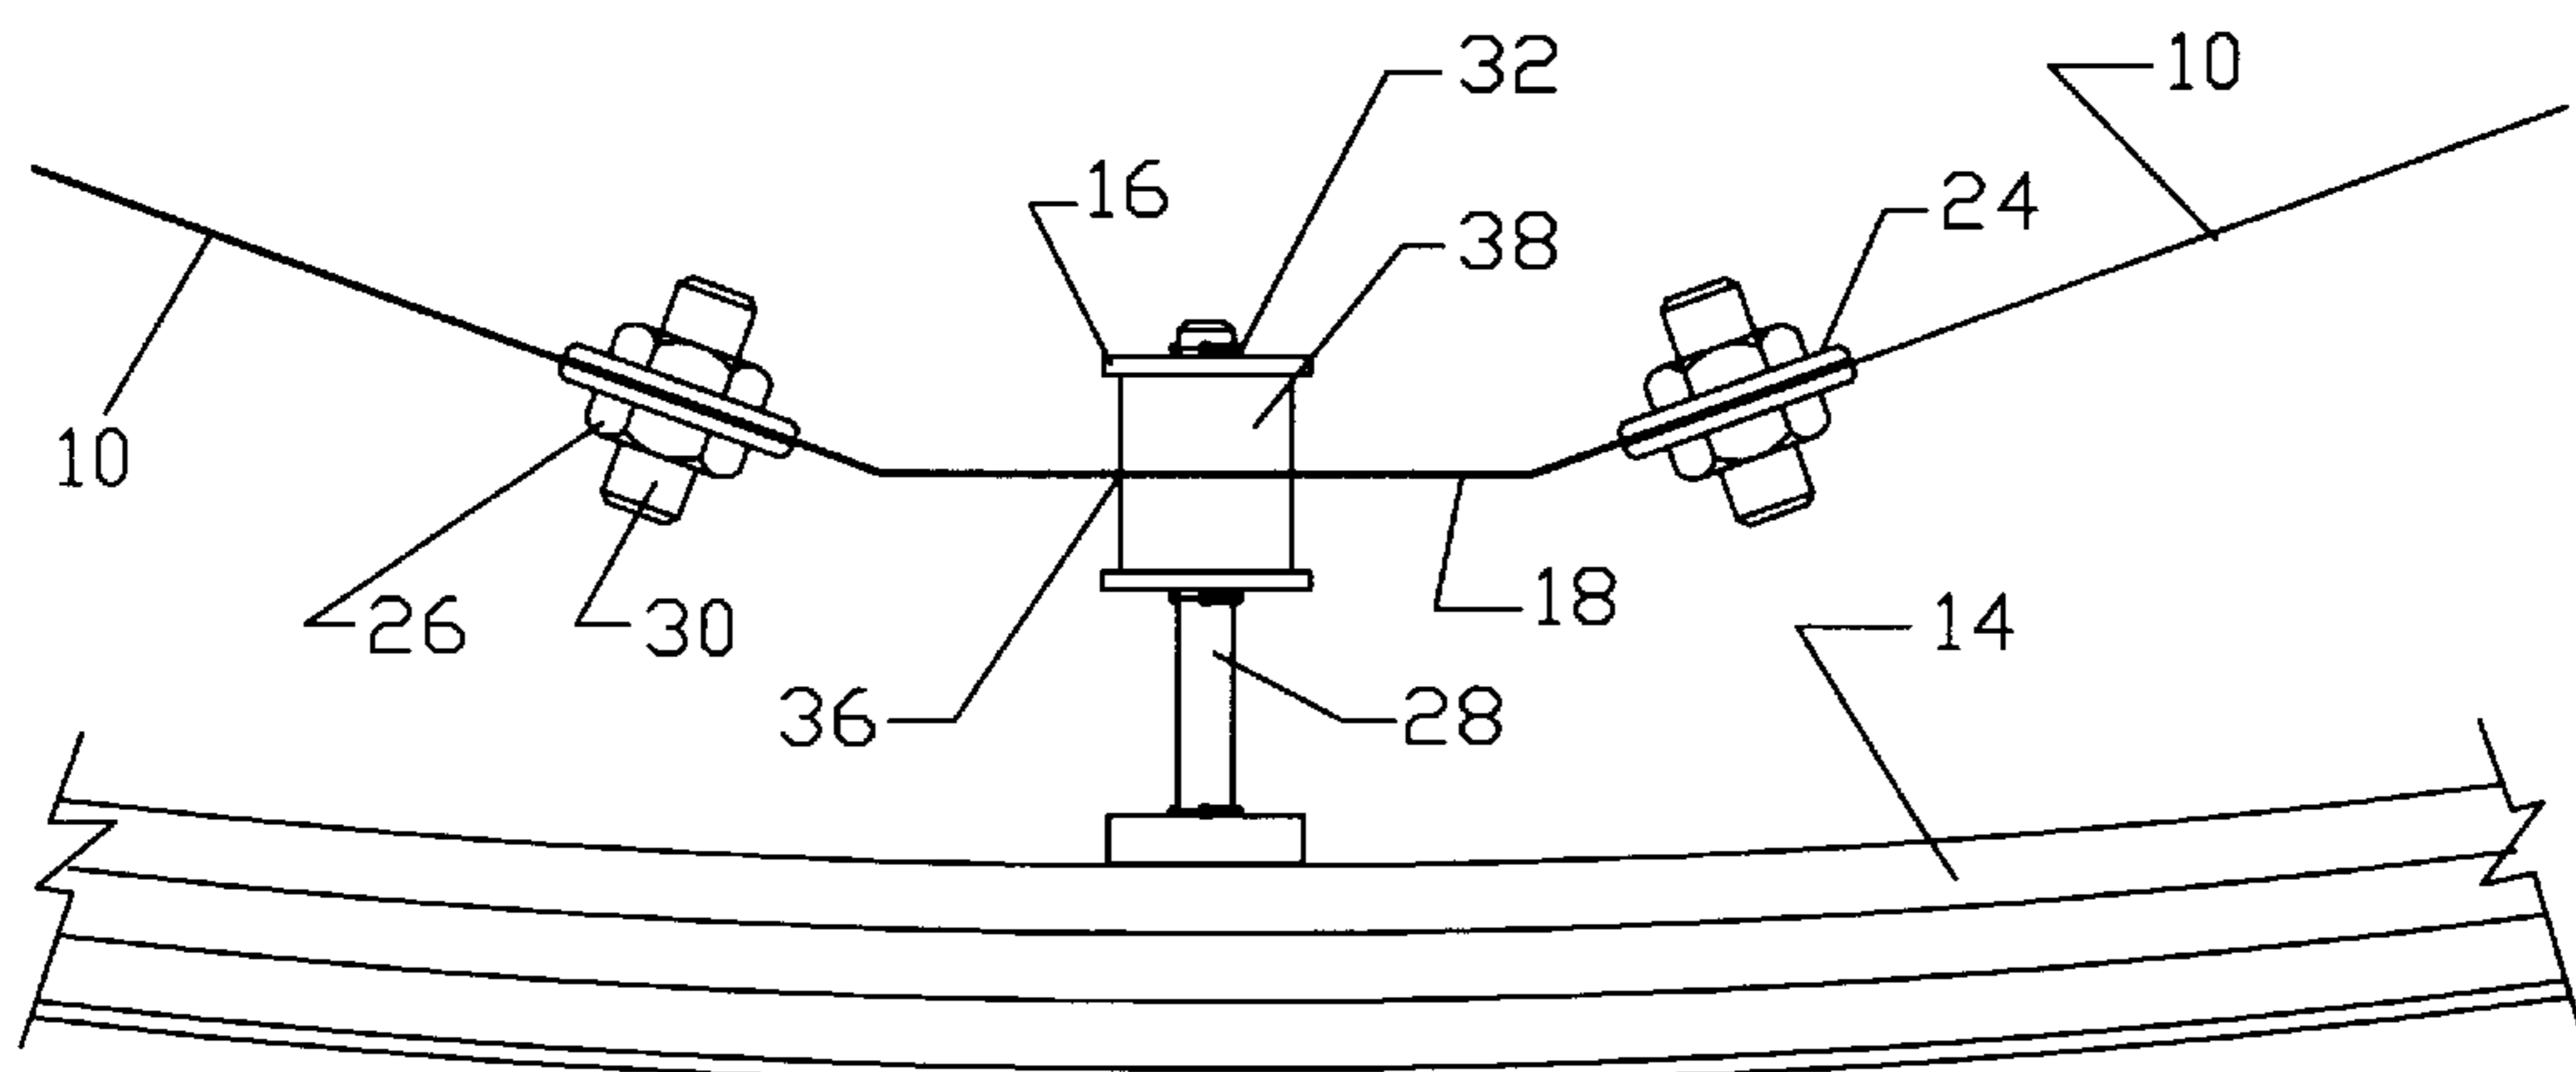


FIG. 3

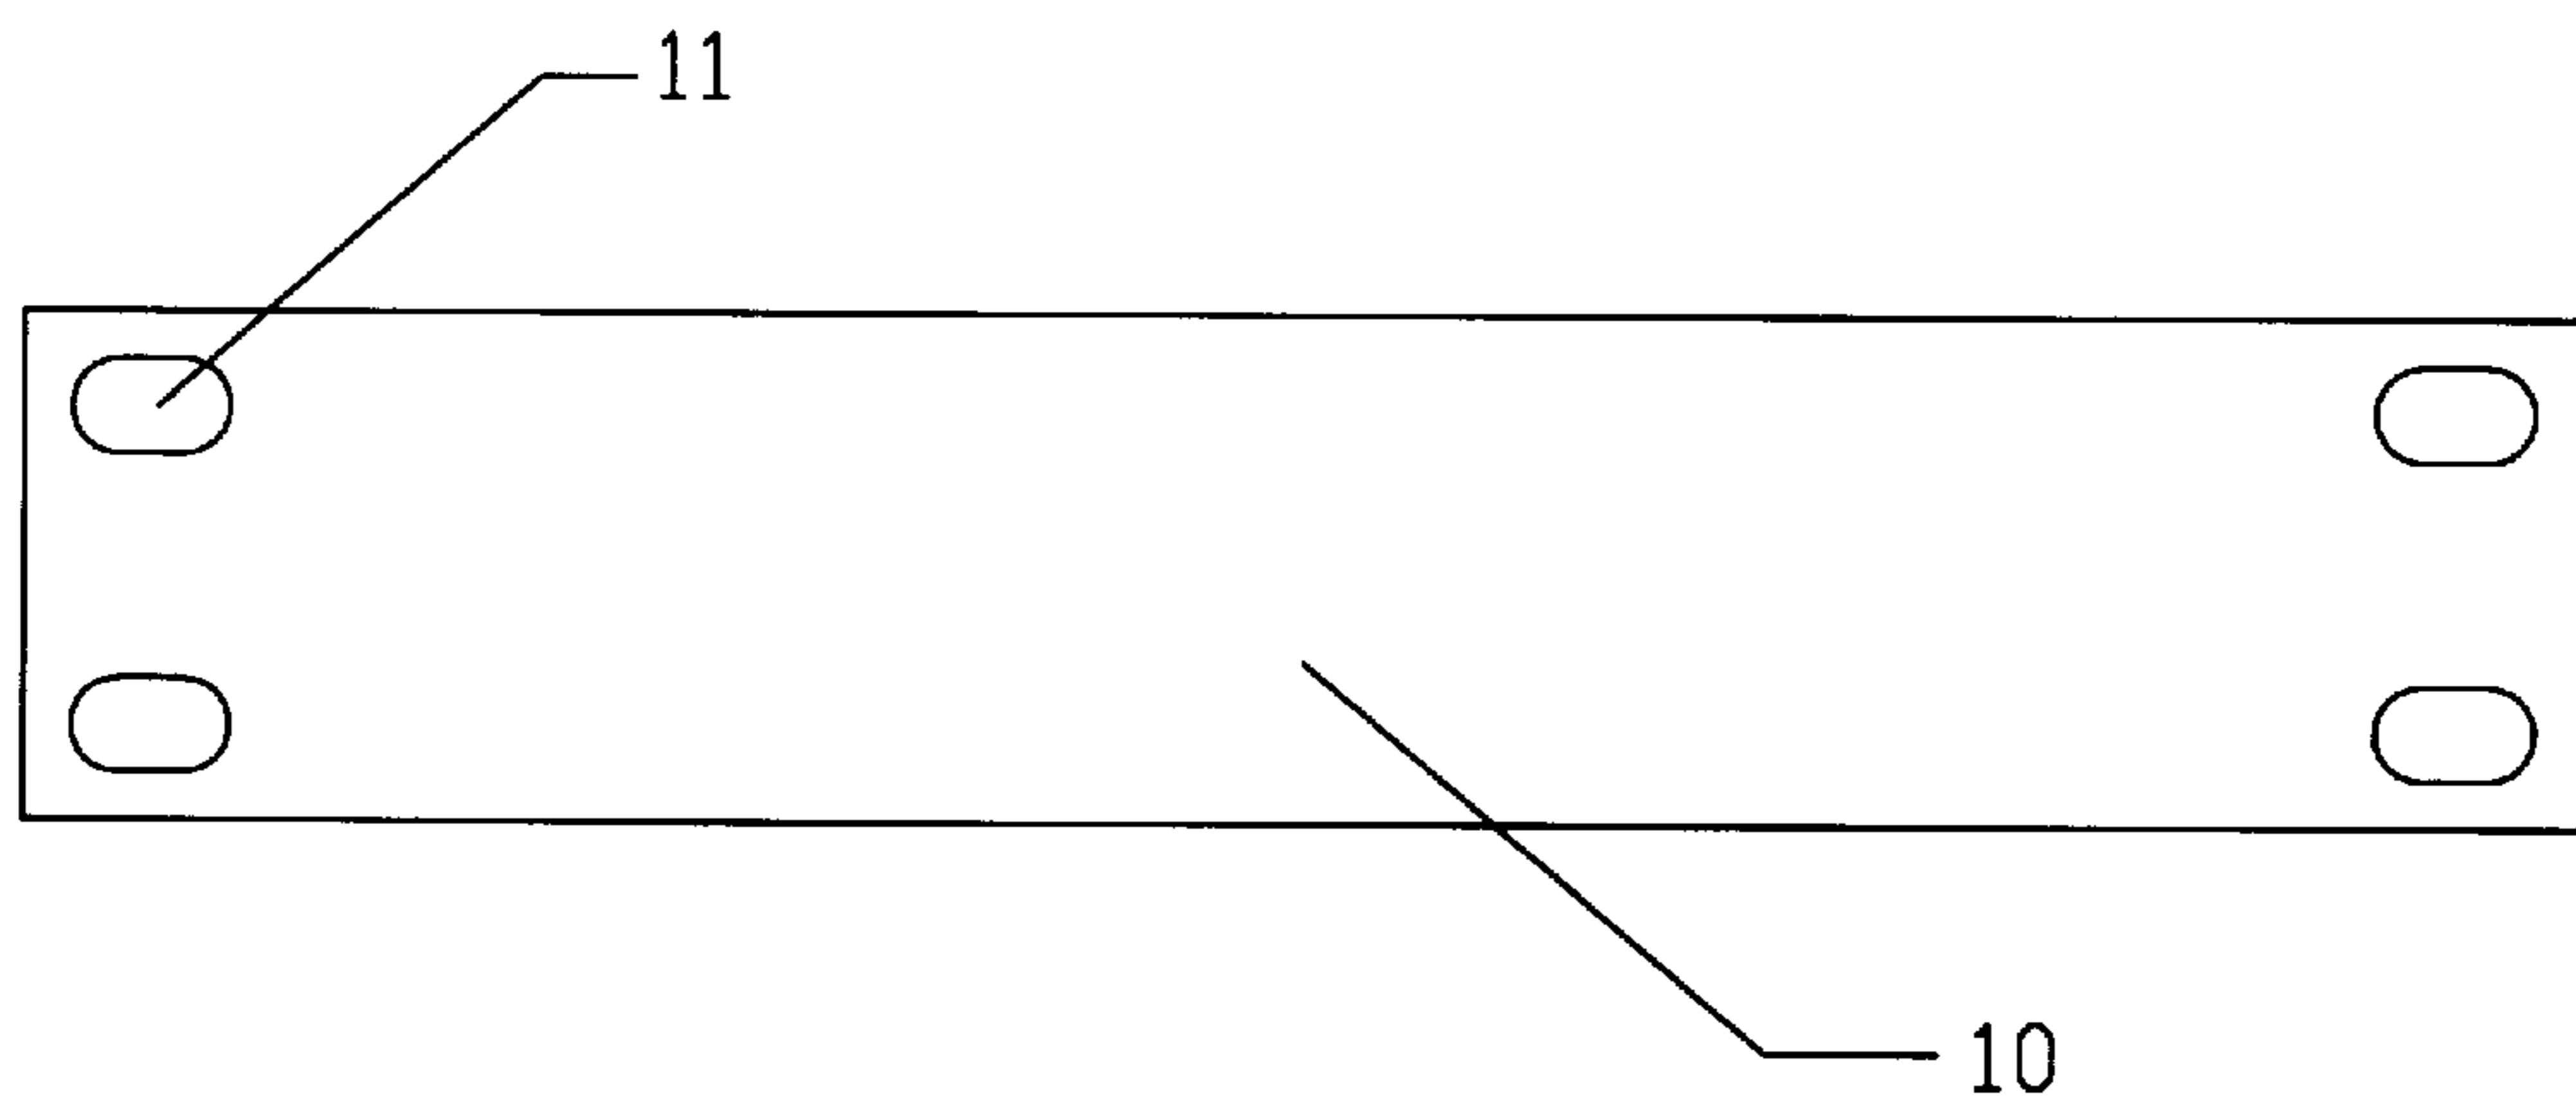


FIG. 4A



FIG. 4B

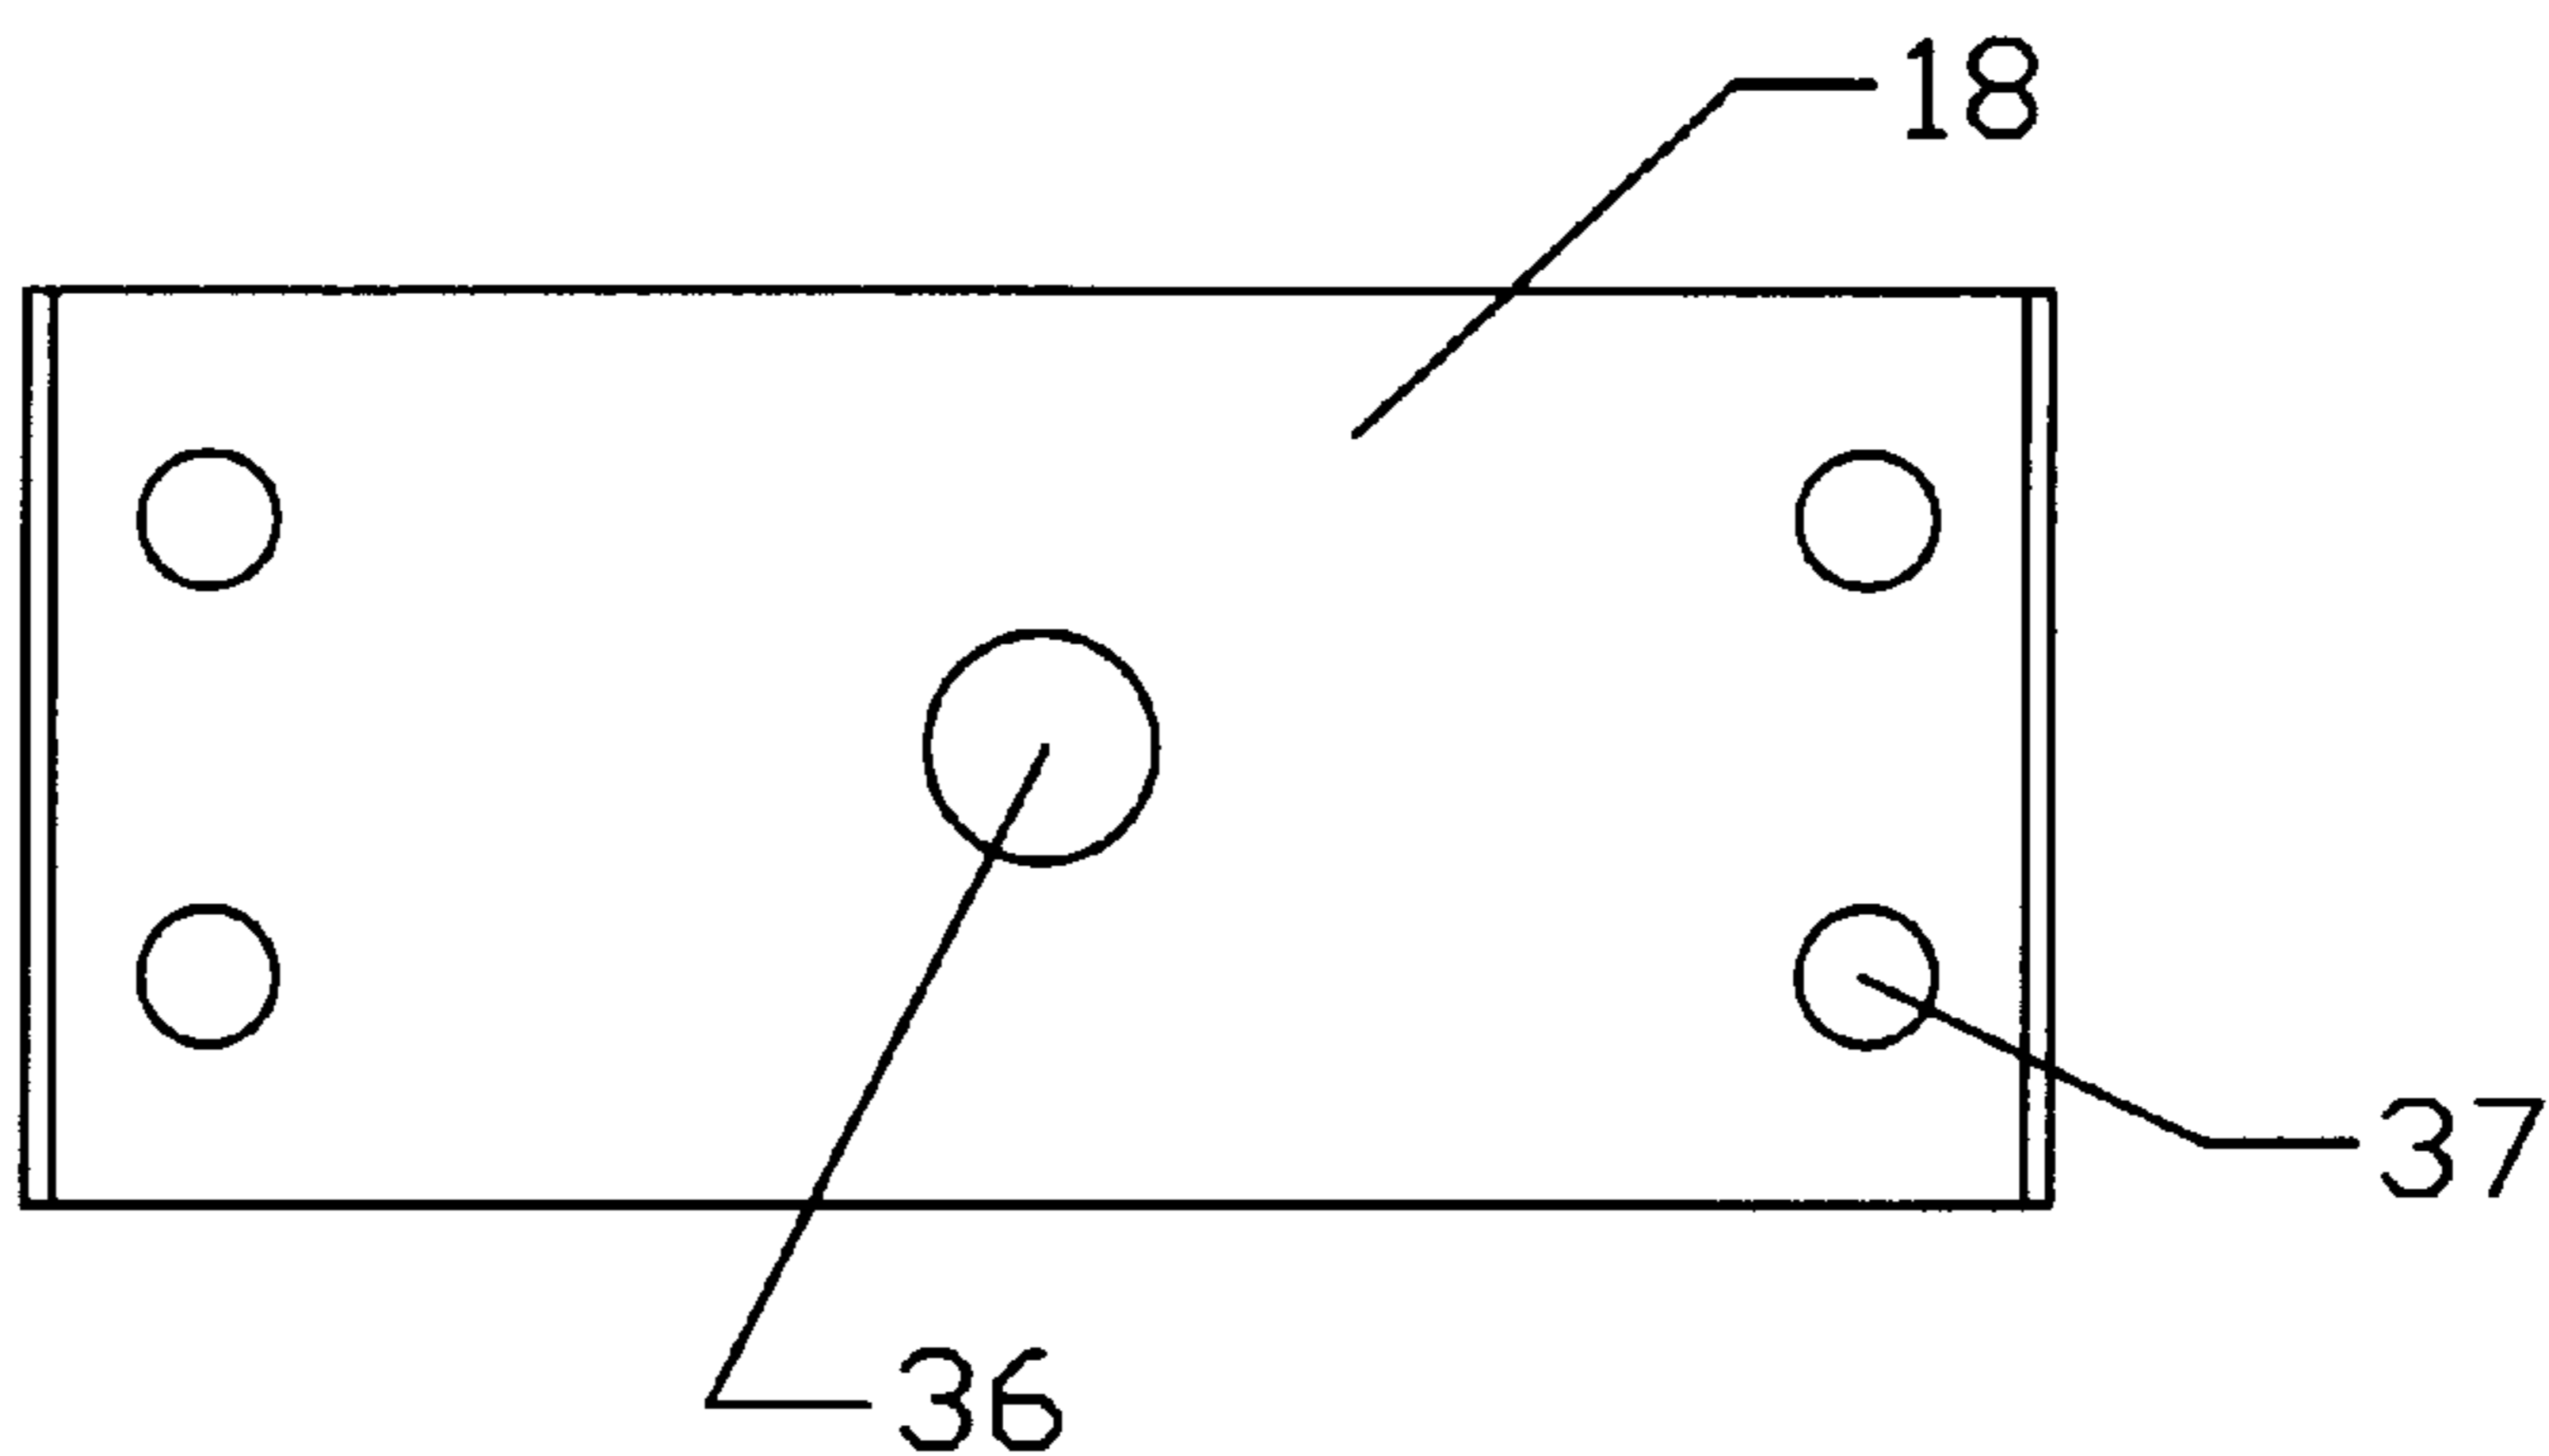


FIG. 5A

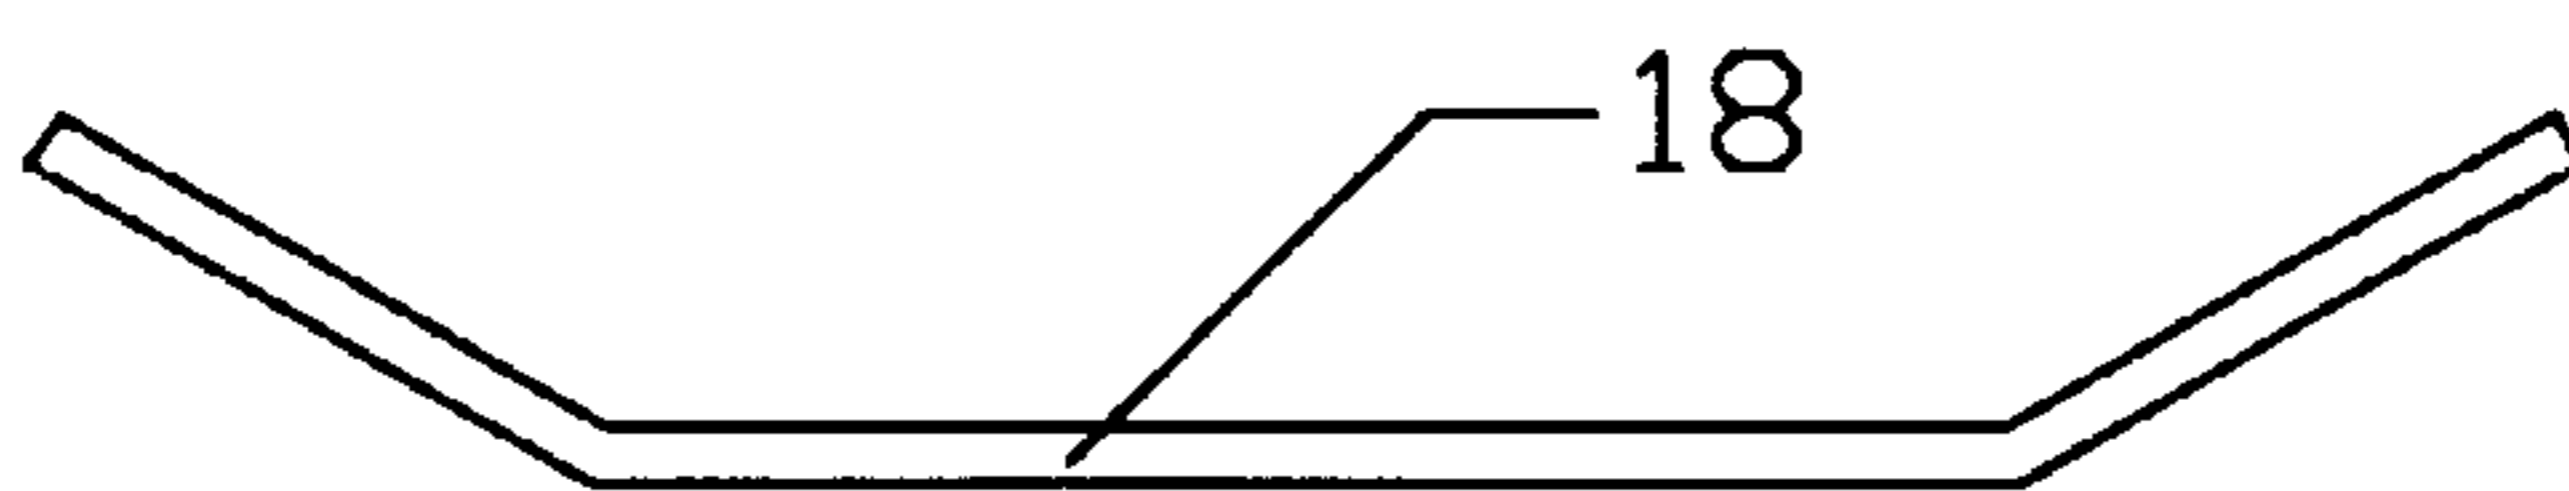


FIG. 5B

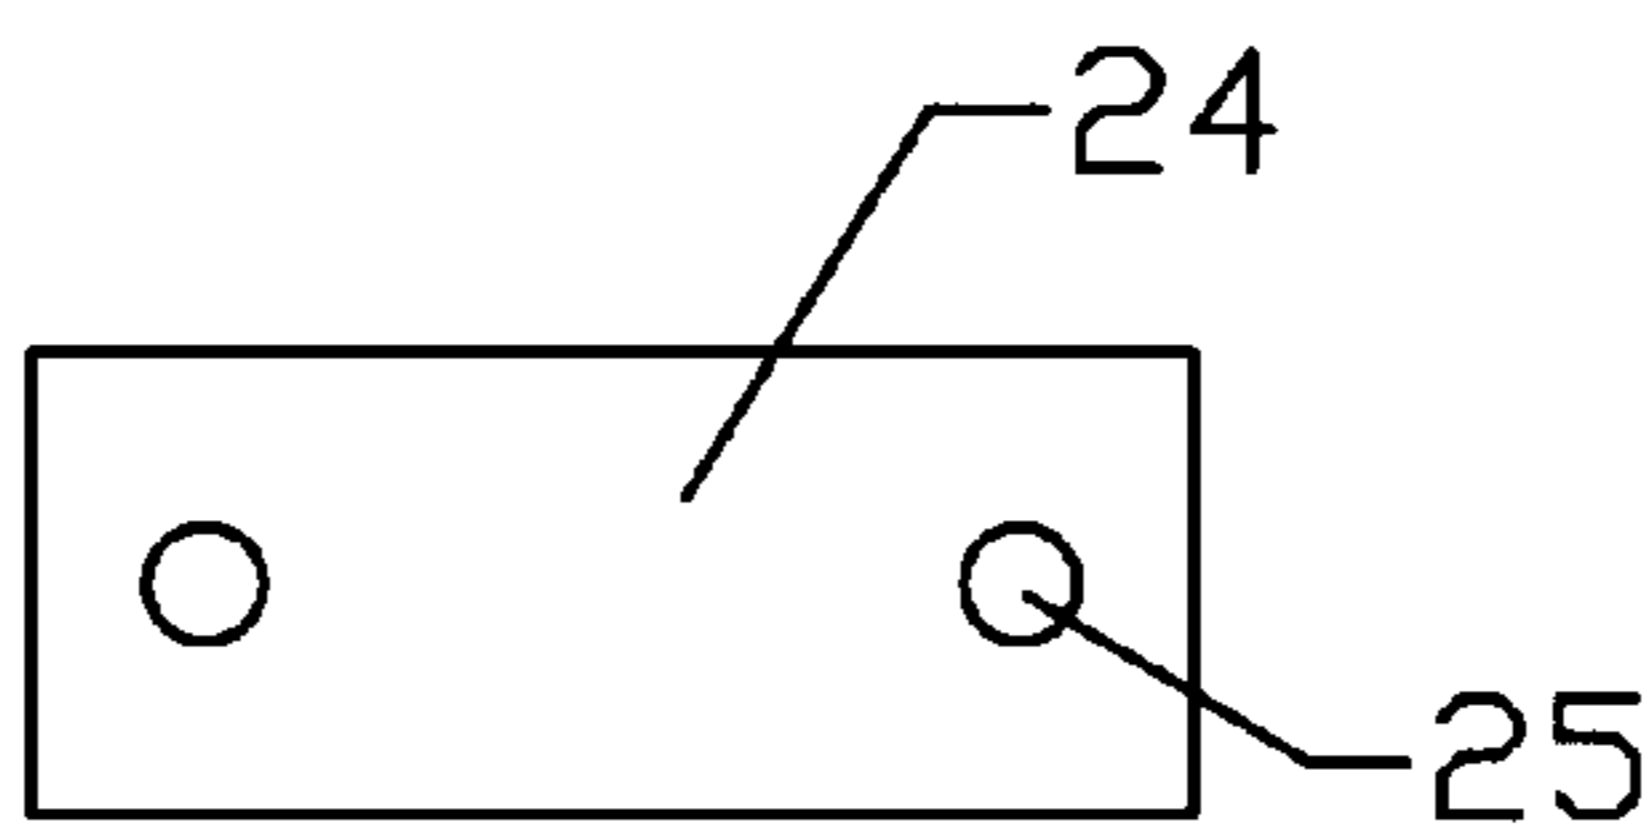


FIG. 6A

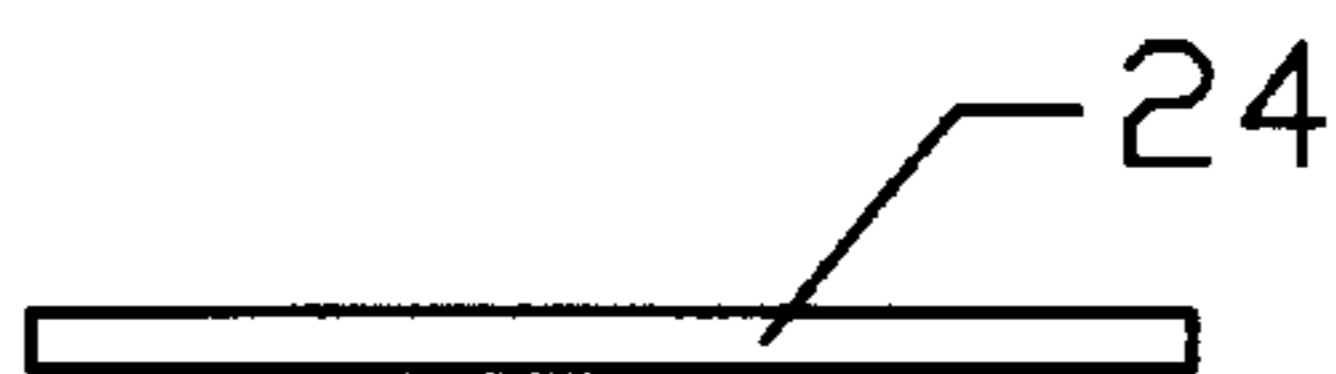


FIG. 6B

PROCESS FOR REPAIRING HEAT TREATING FURNACES AND HEATING ELEMENTS THEREFOR

This application is a continuation in part of U.S. application Ser. No. 09/027,868 filed Feb. 23, 1998.

FIELD OF THE INVENTION

This invention relates to heat treating furnaces which employ electric resistance heating elements, and, in particular, to improved processes for repairing such furnaces and heating elements particularly useful in such repair.

BACKGROUND OF THE INVENTION

Vacuum heat treating furnaces which employ electrical resistance heating elements are well known. Popular designs are presented in U.S. Pat. Nos. 4,559,631 and 4,259,538.

A typical vacuum furnace has a furnace wall and a hot zone chamber of a circular cross-section which houses a series of banks of axial-spaced electrical resistance heating elements suspended from an inner wall of the hot zone chamber by a series of support rods. A heating element is generally made from graphite or molybdenum alloy, and generates radiant heat in response to electrical current passing therethrough.

Over the life of an average furnace the heating elements are subjected to many expansions and contractions as a result of hundreds of heating and cooling cycles. Since only the ends of each of the elements is fixed, these heating and cooling cycles can cause the elements to undergo deformation. As a result of this deformation, the heating elements tend to bow. Stress caused by such deformation can also result in fractures which in turn necessitate replacement of the heating elements.

SUMMARY OF THE INVENTION

The present invention provides, in a preferred embodiment, improved processes and materials for repairing a high temperature vacuum furnace, for example, including a hot zone chamber having an outer and an inner wall. The inner wall includes a heat shield secured to it for containing radiant energy. The hot zone chamber further includes a plurality of banks of electric resistance heating elements spaced axially within the chamber. The replacement heating elements are preferably formed of a relatively pure molybdenum (commercially pure molybdenum) but can be made from other suitable refractory metals, including molybdenum alloys. The preferred molybdenum develops temperatures in the range of 2500 to 2650 degrees F. A substantial number of these elements include a width-to-thickness ratio of no greater than 80 which greatly resists failure during use.

Accordingly, a furnace employing this invention provides a hot zone which is made for heavy duty heat treating applications. The specially designed width-to-thickness aspect ratio of this invention enables heating elements to have a longer life between replacements. These heating elements can be designed in polygon banks or arrays which virtually completely surround the workpiece and provide maximum temperature uniformity during heating.

The vacuum furnace may also include a hot zone having a generally cylindrical outer wall and an inner wall having a heat shield. The hot zone chamber is further defined by a plurality of spaced polygons of electrical resistance heating elements formed to take the shape of a polygon located intermittently along the chamber. Each of the polygons

comprises a plurality of heating elements sandwiched at their transverse ends between a stabilizer bar and a compensator bar. The compensator bars of this embodiment are contoured to provide a shape to the polygon, for example an octagon or pentagon. The polygons are connected to the inner wall of the hot zone chamber by a plurality of support rods which support each of the polygons a distance away from the heat shield. In a preferred embodiment, the heating elements are formed from relatively pure (commercially pure) molybdenum having a width-to-thickness aspect ratio of no greater than 80. In accordance with the present invention, such heating elements can replace heating elements even in existing furnaces having a preponderance of elements having a width-to-thickness ratio of 120 and above.

A BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate preferred embodiments of the invention, as well as other information pertinent to the disclosure, in which:

FIG. 1: is a front cutaway view of a preferred vacuum furnace of this invention;

FIG. 2: is a top partial plan view of the heating element of this invention;

FIG. 3: is a side partial plan view of the heating element connection of FIG. 2;

FIGS. 4(a)-(b): are top and side plan views of a preferred heating element of this invention;

FIGS. 5(a)-(b): are top and side plan views of a preferred compensator bar of this invention; and

FIGS. 6(a)-(b): are top and side plan views of a preferred stabilizer bar of this invention.

A DETAILED DESCRIPTION OF THE INVENTION

With reference to the figures, and particularly to FIGS. 1-3, there is shown a preferred vacuum furnace **100** of this invention. The furnace **100** typically includes an outer wall **20** which supports a hot zone chamber **21**. The hot zone chamber **21** includes an inner and outer wall, the inner wall which includes a heat shield **14**, or other heat insulating means designed to impede heat transmission from the hot zone chamber **21**. The heat insulation means can contain a layer of KAOWOOL, a layer of graphite felt, and a sheet of reflective GRAFOIL. These are common insulating and reflective materials known by those in the vacuum furnace industry.

In general, the furnace **100** usually is formed in a substantially cylindrical shape having a substantially circular internal cross-section which is closed at its forward end by a releasable door. The hot zone chamber **21** can include an internal structure in the form of a walled enclosure disposed inside the outer wall **20** of the furnace and spaced inwardly from the outer wall **20**.

The hot zone chamber **21** comprises a plurality of banks of electric resistance heating elements **10**. These heating elements **10** can be fabricated from graphite or other refractory metal, but are preferably of relatively pure (commercially pure) molybdenum metal, and are typically rigid, elongated straight bars, having a rectangular cross section. The heating elements **10** are preferably oriented end-to-end with one another to form a series of ring-like banks spaced longitudinally within the hot zone chamber **21**. These ring-like banks preferably form a polygon of five to about ten heating elements.

In a preferred embodiment of this invention, the vacuum furnace **100** includes about six to ten longitudinally spaced banks of heating elements **10**, each bank being formed by eight separate elements **10** as shown in FIG. **4a**. The elements **10** preferably include oblong-shaped apertures **11** located approximately near their four corners. These apertures are used for connecting the preferred heating element **10** to the preferred compensator bar **18** and stabilizer bars **24** through their own mounting holes **37** and **25**, respectively, as shown in FIGS. **2** and **3**, **5a** and **6a**. In a preferred embodiment, the heating elements **10** are electrically and mechanically connected to the compensator and stabilizer bars **18** and **24** by a series of threaded bolts **30** and retaining nuts **26** (See FIG. **2**).

As FIG. **3** depicts, the compensator bar **18** contains a central hole **36** (See also FIG. **5A**) for receiving an insulation sleeve **38**. The insulation sleeve **38** is fitted around one of the support rods **28** and is preferably fixed thereto by pin retainers **32** (See also FIG. **2**). The insulation sleeve **38** is made from a ceramic, such as alumina. Accordingly, the heating elements **10**, Compensator bar **18** and stabilizer bars **24** are electrically isolated from the support rods **28**.

In the embodiment illustrated in FIG. **1** the heating element bank is not formed into a complete loop, but has two ends at which an electrical power source is connected. If the banks of heating elements were not electrically isolated from the support rods **28**, and the mounting rod were connected to ground, a short circuit would occur which could cause damage to the furnace.

In FIG. **3**, in addition to the insulation sleeve **38**, a pair of disk-like shields or washers **16** are provided above and below the insulation sleeve **38**. These washers **16** are preferably made of molybdenum or graphite although other similar refractory metal and ceramic materials could be used. The washers **16** have central apertures large enough to permit the passage of the support rods **28**. They are designed to expand and/or compress around the support rods **28** to provide a shield against vapor coming to rest along the support rod and onto the compensator bar **18** or heating element **10**. This can avoid the incidence of electrical short circuits therebetween.

The details of the processes of this invention, operation of furnaces that can be repaired thereby, as well as preferred embodiments of the processes and heating elements **10** will now be described.

After a workpiece has been introduced into the hot zone chamber **21**, electric current is passed through the banks of electric resistance heating elements **10** to generate radiant heat. After the heat treatment cycle is complete, inert cooling gas, such as argon or nitrogen, is introduced into the hot zone chamber **21** in order to quench the workpiece.

It has been found that because of the numerous cycles of heating (expansion) and cooling (compression) that the heating elements experience, and their structure which typically includes dimensions of about 3.0 inches wide by 0.025 inches in thickness, even high temperature molybdenum elements have been found to creep deform. It has also been found that furnace malfunctions result from element failure due to this deformation. Interestingly, such deformations are found to be frequent in vertically or near vertically oriented elements.

The use of relatively pure (commercially pure) molybdenum has been found to reduce the tendency of the elements **10** to deform. Thus in preferred heating elements **10** of this invention are relatively pure molybdenum. However, this invention relies upon using heating elements having the

preferred lower width-to-thickness aspect ratio. In a typical prior art heating element using a 3.0 inch width and a 0.025 inch thickness the width-to-thickness ratio is 120. Although gravitational forces might be expected to have a higher impact on thin elements, that impact would not appear to account for the high incidence of failure in elements that are vertical or approach the vertical. The advantages of using thin (high width-to-thickness aspect ratio) elements had pushed the industry to using comparatively high aspect ratio elements. In repair of furnaces having deformed or broken elements (including element sections) significant effort has been made to use replacement material dimensionally identical to the design of the original element thus having identically high width-to-thickness aspect ratio.

In accordance with this invention, rather than using high aspect ratio elements, the preferred elements have an aspect ratio of substantially less than those used in the malfunctioning furnace. The preferred elements of this invention have a width-to-length aspect ratio of less than about 80 (for example, corresponding to dimensions for the heating elements of about 2.6 inches wide by about 0.0325 inches thick). An especially preferred embodiment of this invention uses a ratio of more than about 15 to no greater than about 53 (for example, corresponding to dimensions for the heating elements of about 2 inches wide by about 0.0375 inches thick). In the most preferred embodiment the width-to-thickness ratio is less than 25, most desirably between about 15 and 25 (for example, corresponding to dimensions of about 1 inch wide by 0.066 inches thick and 1.25 inches wide by 0.050 inches thick, respectively).

If the cross-sectional area of the elements is at least within about 98%–102%, and preferably within $\pm 0.05\%$ of the cross-sectional area of the elements being replaced (either in the design and construction of new furnace or in the repair of an existing furnace) the heating elements of this invention can be substituted in existing furnace designs and fabrications without redesigning power consumption or instrumentation requirements. This is especially valuable in the repair of existing furnaces.

Accordingly, in a repair of an existing furnace (including preventative maintenance and furnace upgrade replacements) it is necessary to determine the composition and the dimensions of the element (which can include an element section) to be replaced. According to this invention the dimensional determination would also require determining the cross-sectional area of the heating element. In elements having a generally rectangular cross section, which is the prevalent shape in the industry, the cross-sectional area would, of course, be determined by multiplying the element width times its thickness. The replacement in accordance with this invention would be an element having a thicker and narrower element than previously existed in the furnace. The replacement can be accomplished by conventional means, for example by using high refractory metal bolts or the connection system described above, whichever is appropriate for the furnace to be repaired.

The hot zone of this invention can operate within a temperature range of about 400 to 2500 degrees F, and optionally up to about 3000 degrees F with a high degree of temperature uniformity and long product life. The hot zone preferably has a work capacity at 2100 degrees F of at least 1000 pounds with a heating element loop of at least 20–34 inches in diameter. The system is designed to operate in conjunction with a roughing pump and a diffusion pump with the overall system operating in a vacuum range of about 10^{-5} Torr.

From the forgoing, it can be understood that this invention provides improved vacuum furnaces and hot zone chambers

5

suitable for vacuum furnaces which prolong the life of the heating elements and provide greater creep resistance and long term cycle life. In addition, the method of element replacement provides a furnace less likely to fail and thus less likely to interrupt production operations. Although various embodiments have been illustrated, this is for the purpose of describing, but not limiting the invention. Various modifications, which will become apparent to one skilled in the art, are within the scope of this invention described in the appended claims.

What is claimed is:

1. A process for repairing high temperature heat treating furnaces comprising determining the cross-sectional dimension of the element to be replaced, and replacing said element with a second element that: (a) has substantially the

6

same cross-sectional area as the element to be replaced, but (b) has a significantly lower width to thickness ratio.

2. The process of claim 1 wherein the process further comprises the step of determining the composition of said element and said second element has a width-to-thickness aspect ratio of less than about 80.

3. The process of claim 2 wherein said width-to-thickness ratio is less than about 25 and greater than about 15.

4. A heating element for a high temperature heat treating furnace said element having a width-to-thickness ratio less than about 80.

5. The heating element of claim 4 wherein said ratio is less than about 25 and greater than about 15.

* * * * *